


EKOKAT PRIMER BBA

Gross Concrete Primer

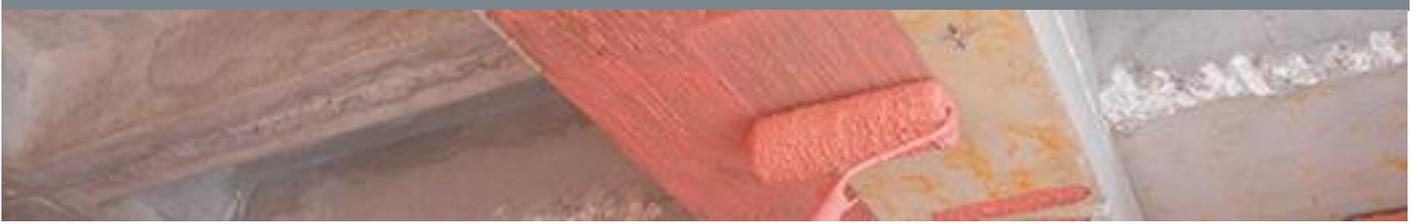

DESCRIPTION

Acrylic-based gross concrete primer with a special fill.

TECHNICAL SPECIFICATIONS

| | |
|------------------------------------|---------------------------|
| Appearance | Tile red |
| Amount of Consumption | 200-300 gr/m ² |
| Drying Time | 12-24 hours (23°C) |
| Appearance of Finished Film | Transparent film |
| Application Temperature | +5°C to +35°C |
| Application Tools | Lambskin roll |

* The above values are valid for + 23°C and 50% relative humidity. The time is shortened at high temperatures and extended at low temperatures.

AREAS OF USE

It is used as a primer to improve adherence under plaster and prevent rapid water absorption on surfaces with high absorbency such as gross concrete.

BENEFITS

It is easy to apply and ready for use. It improves surface adherence. It prevents fast water loss.

INSTRUCTIONS FOR USE

EKOKAT PRIMER BBA is diluted with water at the ratio of 15 - 20% and mixed until it becomes homogenous. It is applied as a single coat using a lambskin roll. Plaster application is started after it has dried thoroughly. During application, EKOKAT PRIMER BBA is intermittently mixed to keep it in a homogenous state. Care must be taken to avoid sedimentation.

PACKAGING

15 kg plastic buckets

STORAGE CONDITIONS AND SHELF LIFE

No more than three buckets should be placed on top of each other in their unopened original packaging, in a cool and dry environment. Shelf life is 12 months from date of production under suitable storage conditions. Protect from sun and frost.

Date: 02.03.2017 Revision: 00

ÇULLAS YAPI MALZEMELERİ SANAYİ ve DIŞ TİCARET A.Ş.
Çoraklar Mahallesi 5024 Sokak No:10 Aliğa Organize Sanayi Bölgesi - Aliğa / İzmir
TURKEY
T. +90 216 457 80 10 F. +90 216 457 82 60
info@ekokat.com www.ekokat.com



EKOKAT PRIMER BBA

Gross Concrete Primer

SAFETY MEASURES

Work clothes, protective gloves, goggles and masks suitable for workers health and safety should be used during the application. Due to irritant effects of uncured material, it should be washed with plenty of water and soap immediately in case of contact with skin and eyes. If swallowed, seek medical advice immediately. No food and drink should be brought into application areas. Store it out of reach of children. Please refer to the safety data sheet for further information.

RESPONSIBILITY

Our Company may not be held liable for any application errors that might be suffered if the product is not used for its intended purposes, or if it is failed to conform to the conditions and proposals specified above regarding technical application. This technical data sheet contains information that is current as of the date of issuance hereof. The manufacturer hereby reserves its right to change this data sheet at any time.

|||| EK 1210.030.15

 White

Date: 02.03.2017 Revision: 00

ÇULLAS YAPI MALZEMELERİ SANAYİ ve DIŞ TİCARET A.Ş.
Çoraklar Mahallesi 5024 Sokak No:10 Aliğa Organize Sanayi Bölgesi - Aliğa / İzmir
TURKEY
T. +90 216 457 80 10 F. +90 216 457 82 60
info@ekokat.com www.ekokat.com

